

A good-looking, long-lasting door.

DS-200



Commercial DS-200 Roll-Up Steel Doors



Loading docks, outbuildings and large storage facilities are typical uses for the attractive appearance, sturdy construction, generous dimensions and long service life of DS-200 doors.

DS-200 roll-up doors are available in round or square profiles. The

continuous curtains are made from hot-dipped galvanized steel, and then finished with silicone polyester paint for beauty and durability.

Installation to masonry, steel or wood jambs is quick, and simple—no special preparation, no overhead tracks.

Steel slide-bolt assemblies at each bottom corner secure the closed door from inside. For added protection, the slide-bolts also accept padlocks. A sliding curtain lock also is available for securing the door from outside.


DS-200 Commercial Roll-Up Steel Doors are available in a variety of standard and special colors. You get the doors you need with timely delivery and attractive pricing. Write, call or fax us for specifying/ordering information.

DS-200 doors secure your property beautifully.



- 1** *Corrugated top sheet assembly* forms a strong torque cylinder for strength and easy operation, and conceals the spring mechanism.
- 2** *Corrugated door curtain*, available in round or square profile, is hot-dipped, galvanized 26-Ga. steel, primed then finished with high gloss silicone polyester paint.
- 3** *Polypropylene anti-wear strips* come factory-installed as continuous guides for sliding metal parts, providing quieter operation and longer service life.
- 4** *Axle casting assembly* holds constant door tension, and allows easy adjustments. Heavy-duty steel bracket plates rigidly support axle, spring and door.
- 5** *Drum wheel* is deep-drawn galvanized steel with 1-5/16" steel bearings.
- 6** *Bottom angle assembly* includes heavy-duty steel angle, extruded aluminum bottom bar and replaceable tubular-type vinyl astragal.
- 7** *Slide-bolt assemblies* made of heavy-duty steel lock the closed door from inside at the bottom corners. For added security, both slide bolts accept padlocks. An exterior sliding curtain lock also is available.
- 8** *Roll-up door guides* are 14-Ga. galvanized steel, 2" wide. DS-200 guides install to masonry, steel or wood construction equally well.
- 9** *Automatic door stops* prevent door from rolling up past the header.
- 10** *Tempered steel springs* are engineered to counterbalance different door sizes and weights for smooth, easy operation and long service life. Both springs are clip-welded to the axle for correct location and extension.
- 11** *Heavy-duty steel axle* supports door curtain and counterbalance system.

20 Year Warranty Against Chalk and Fade

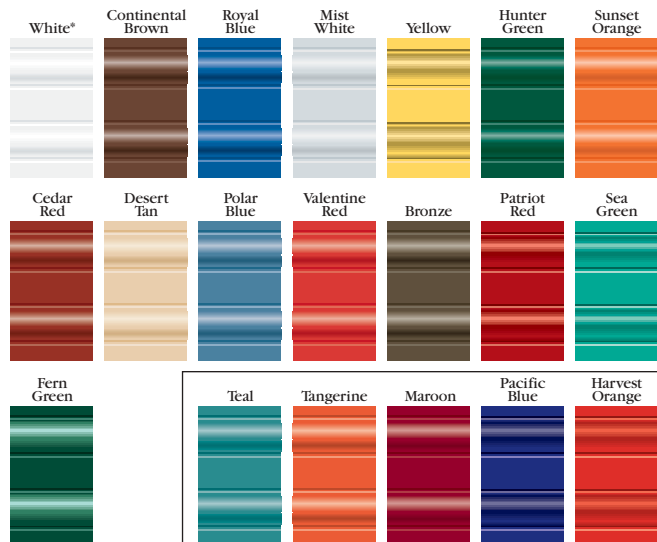

10 Year Warranty Against Chalk and Fade

* White is also available in a Glossy White finish



Optional direct-drive chain hoist is available for door sizes up to 12' X 12'.




Optional 4:1 reduced drive chain hoist is available for door sizes 12'1" X 16'0".



Optional electric operator kit adapts any door to motorized operation.



Optional steel mounting plates provide lateral extension of jambs.




Optional viewlights, only available on uninsulated doors, let occupants see outside without opening the door.



Optional door insulation features two layers of aluminum mylar film laminated to two layers of heavy-duty

polyethylene air-bubble material. Its "R"-value of 4 helps control heat gain/loss. Includes flexible vinyl top and side draft stops as weather seals between the door and the building.



Optional Heavy Duty Guide 13 ga. galvanized G section and 8 ga. galvanized wall angle attaches to wood steel or masonry jambs.

Warranty: Wayne-Dalton Corp. and its subsidiaries back all of their doors and fittings with a LIMITED WARRANTY against defects in materials and workmanship. Paint has a limited warranty to hold up against weather induced chipping, cracking, and peeling for 25 years. Refer to each color for the number of years warranted not to chalk or change color. A copy of this warranty is available upon request.

Because of continuing product improvements, we reserve the right to change the product specifications and designs without prior notice.



www.wayne-dalton.com

Wayne-Dalton Corp. • Door & Systems Division • 2589 C.R. 168 • Dundee, OH 44624
Toll-free: 800-795-5095 • Phone: 330-893-3233 • Fax: 330-893-3371